

UltraMax® 1200-CC

This plant is designed for larger-sized jobs that require cubicle spec products from a highly portable crushing and screening plant on one chassis.

PRIMARY FEATURES

- Available in tri-axle or quad-axle version. Each features one-pull transport with optional rear tag axle. Check with your DOT.

1. Two-deck inclined screen produces two cubical spec products. Plant is also available with a twin-shaft screen option with third reliever deck.

- Top-deck retained material is returned to the crusher for further processing.
- Hydraulic lift and leveling system enables quick set up and tear down by using the hydraulic run-on legs.


2. Totally self-contained, reliable diesel/electric or all-electric power. You won't have to worry about hydraulic leaks and failures shutting you down.

3. Available cross-belt permanent magnet stays on for transport. In-line electromagnet also available (must be removed for transport).

- Features the industry's first LIFETIME ROTOR WARRANTY on its solid-steel, three-bar,sculptured rotor—the industry's heaviest—to keep you up and crushing.*

** North America only.*



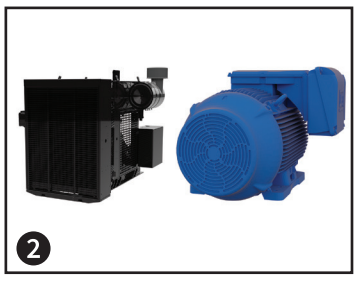




ADDITIONAL FEATURES

- Features closed-circuit crushing and screening on one chassis.
- Replaces Jaw/Cone/Screen multi-unit systems for a much lower initial investment while maintaining a high production of cubical spec product. Greatly reduces maintenance and fuel costs and is easily transported.
- Features unique two-step, 5' grizzly deck to remove fines before crushing.
- Features standard grizzly bypass chute and available cross-belt conveyor with hydraulically actuated flop gate to allow for either removal of the material that passes through the grizzly deck for stockpiling or blending back with the crushed material.
- Includes removable electrical control panel featuring pre-wired receptacles for radial stackers.
- Transports easily with the hydraulically retractable return and side discharge conveyors.
- Manage the feeder speed for complete control of the flow of material into the impactor and on return conveyor with Variable Frequency Drives (VFD).
- Includes wireless remote control for the feeder shutdown and all motor stop.

ULTRAMAX® 1200-CC


CC refers to a crushing/screening closed-circuit plant on one chassis.

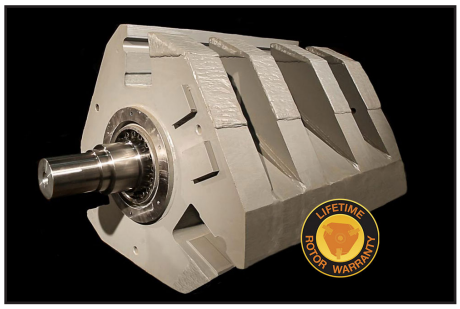

Solid-steel, three-bar, sculptured rotor with LIFETIME ROTOR WARRANTY, North America only.



Top-deck retained material is returned to the crusher for further processing.

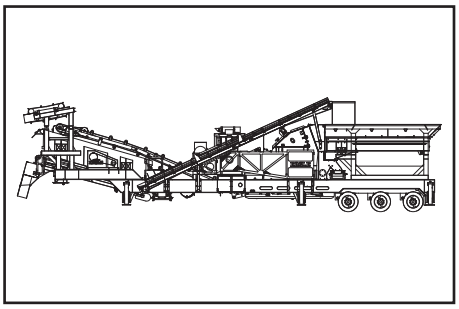

1200-25 CC PORTABLE IMPACTOR PLANT TECHNICAL SPECIFICATIONS*

Model	Tri-Axle	Quad-Axle
Impactor	UM-25	
Operating Length	63' 3" / 19.3M	66' 9" / 20.3M
Gross Weight	124000lbs / 562500kg	126000lbs / 572000kg
Travel Length	63' 3" / 19.3M	66' 9" / 20.3M
Travel Width	11' 11" / 3.6M	
Travel Height	13' 5" / 4.1M	
Feed Hopper Capacity	17yd^3 / 13M^3	
Feed Hopper Capacity (Tons)	23.0T / 20.9MT	
Vibrating Feeder	18' x 45.5" / 5.5M x 1.2M	
Feeder Grizzly Deck	60" long 2 step / 1524mm 2 step	
On-Plant Power Supply Diesel	13.6L, 451HP / 336kW diesel engine and 200kW generator 9.3L, 455HP / 339kW diesel engine and 140kW generator	
On-Plant Power Supply Electric	300HP / 224kW all-electric power	
Discharge Conveyor Width	42" / 1067mm	
Two Deck Inclined Screen	5' x 16' / 1.5M x 4.9M	
Top Screen Deck Cross Conveyor Width	18" / 457mm	
Bottom Screen Deck Cross Conveyor Width	24" / 610mm	
Fines Screen Conveyor Width	42" / 1067mm	
Return Conveyor (Hydraulic Fold) Width	24" / 610mm	

ULTRAMAX® IMPACTOR MODEL AND SPECIFICATIONS*

	Diameter x Width	Width x Height				
Model	**Rotor** (Inches / Millimeters)	**Feed Opening** (Inches / Millimeters)	**Power Required** (HP / kW)	**Approx. Weight** (lbs / kg)	**Rotor Weight** (lbs / kg)	**Production Capacity****
UM-25	47 x 47 / 1194 x 1194	48 x 34 / 1219 x 864	150 - 300 / 112 - 224	34000 / 15400	13000 / 5900	Varies by application.

*Design specifications subject to change without notice.

**Contact your Eagle Sales Representative with your specific application for anticipated production capacity.

Call 800-25-EAGLE (800-253-2453) or visit www.EagleCrusher.com
525 South Market St., Galion, OH 44833 • 419-468-2288 • fax: 419-468-4840 • email: sales@eaglecrusher.com

EAGLE CRUSHER®

Rev 03/2025

©2025 Eagle Crusher Company, Inc.